




Product Specification

P3 Indoor

Product Picture of Indoor P3



Whole Position of Indoor P3

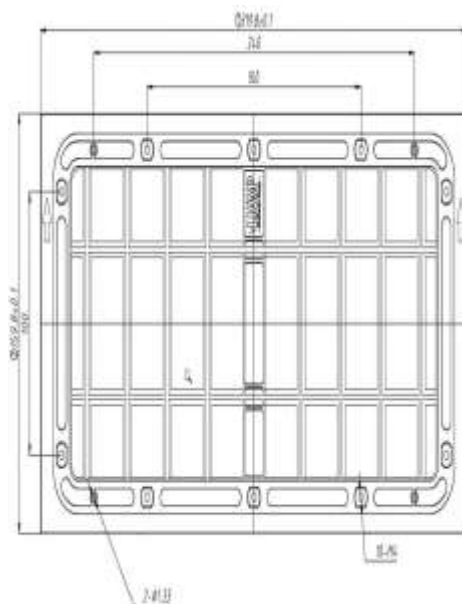

Parameter of Indoor P3

LED Type	SMD2020
Pixel Pitch	3mm
Module Resolution	W64*H64 dots
Interface	HUB75-16P
Module Size	W192*H192mm
Module weight	230g
Pixel Density	111,111dots/m ²
Pixel configuration	1R1G1B
Module QTY/m²	27.12 pcs/ m ²
Min. Viewing Distance	≥3m
Brightness	≥500 cd/m ²
Viewing angle	H≥160° V≥140°
Driving Mode	1/32 scan constant current
Input Voltage	5VDC
Max. Power Consumption	14 W / Piece
Avg. Power Consumption	7 W / Piece
Single Processing Depth	16384
Video frame rate	60 frames/s
Refresh rate	≥1920Hz
Defective Dots rate	<0.0001 (LED industry standard: ≤ 0.0003)
Decay Rate (Operate 3 Years)	≤15%
Brightness Conformity	≥97%
Colors	281 trillion
MTBF	≥10000 hours
Lifespan	≥100000 hours
Protective function	Over-heat/Over-load /Power-down /Power-leakage /Lightning-protection etc.
Operating Temperature	-20°C~+60°C
Operating Humidity	10-80% no condensation
Storage Temperature	-20°C~+60°C
Storage Humidity	10-80% no condensation

Control System Parameter	
Color Temperature	Adjustable by software
Brightness level	256 levels, automatic or manual adjustment
Control way	Computer, real time, off-line, wireless, and internet etc.
Communication Distance	CaT5 UTP 100 meters, max. 130 meters; or optical fiber